



CE50 Extra Power Combination Sumpcleaner/Filter and Coolant Dispenser- Electric




Remove coolant and solids quickly AND deliver fresh coolant back to sump with the twin tank system of CECOR's Extra Power Combination Sumpcleaner and Coolant Dispenser. Unit features two separate compartments on a single chassis - each with pump in/pump out capability.

- Available in 100/100, 150/150, 200/200, 250/250 and 300/300 gallon capacity.
- Pumping rate to 110 gallons per minute.
- Generates suction to 13" Hg (Mercury) or 177" water.
- 208-230-460/60/3 electricals.
- Five Horsepower electric motor.

Caution: Machines must not be used for flammable fluids (fuels, paints, solvents, etc.). Avoid use in extra-high temperature or spark-hazard environments (ovens, welding areas, etc.).

CE50-100/100PT

F23 - 2.3 Cubic Foot Filter

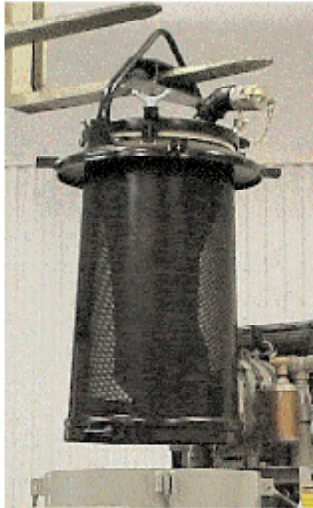

The F23 filter is standard on the CE50 tank sizes of 100/100, 150/150 and 200/200 gallons. With a capacity of 2.3 cubic feet, the F23 filter is fitted for fork lift or hook hoist handling. Patented compound linkage and rotary latch control the bottom opening door for safe emptying. The filter assembly comes complete with a polypropylene filter sleeve. Optional fine weave polypropylene filter sleeve available.

F50 - 5.0 Cubic Foot Filter

F50 - 5 Cubic Foot Filter

The extra capacity filter, the F50, has a capacity of 5 cubic feet and is standard on tank sizes 250/250 and 300/300. The filter consists of a perforated metal outer basket with a polypropylene mesh liner sleeve. The sleeve provides a continuous filter, unbroken by slits or openings which can leak solids into the coolant. Filter also features a built-in lifting bail, anti-bridging reverse tapered sides and patented positive locking latch. Fittings for fork lift handling are integral to the two-piece cover. Optional fine weave polypropylene filter sleeve available.



F23 2.3 Cubic Foot Filter

Tank Size: 100/100, 150/150, 200/200, 250/250, 300/300 gallon capacity.

Motor: 5 HP Electric Motor
Volts 208-230/460
Amps 14.8-14.0/7.0
Hertz 60
Phase 3

Pump: Lobe Type, Positive Displacement air pump.

Pumping Rate: Up to 110 gallons per minute.

Suction Lift: 13" Hg (Mercury) or 177" water.

Pressure Discharge: 6 PSI (pounds per square inch) with safety backup valve.

Filter: F23 filter has 2.3 cubic feet capacity. F50 Filter for 250/250, and 300/300 gallon tanks has 5 cu.ft. capacity.

Filter Sleeve: Available in regular and fine polypropylene sleeves.

Spill Prevention: Automatic overflow control. All discharge ports are valved.



CE50-100/100PT

Hose: 2" I.D. x 16' oil-resistant PVC dirty tank pick-up suction/discharge hose including quick-disconnect couplers and suction tools. Clean coolant dispensing hose of heavy section plastic 1-1/2 x 16' with full flow shut-off nozzle.

Cleaning Tools: Flared Nozzle
Flexible Nozzle
Straight Nozzle

Power Cord: 15 feet standard
50 feet available

See page 33 for information on base options.

Options

Model Number	Tank Size	Cleanout Door	Transport	Wheels	Dimensions	Shipping Weight	TW Base	PLB Base	PM Base	CB1 Base	CB2 Base	CB3 Base	CB4 Base	CB5 Base	F23 Filter	Floor Storage
CE50-100/100PT	100/100 gallons per side	8" x 10" with a 1 1/2" drain port.	PT Base for push or tow transport	Two 12" x 3" poly wheels and one 8" x 3" poly-caster	92" long 34" wide 61" high	1350 lbs.	X	X	X	X	X	X	X	X	X	X
CE50-150/150TW	150/150 gallons per side			Two heavy-duty 16" x 4" wheels and one 12" x 3" swivel casters.	96" long 42" wide 69" high	1630 lbs.	S	NA	X	X	X	X	X	X	X	X
CE50-200/200TW	200/200 gallons per side		TW Base - Tow Bar with pinde-eye hitch to accommodate most in-plant tugs or tractors.	Two heavy-duty 16" x 4" wheels and two 12" x 3" swivel casters.	99" long 46" wide 75" high	2035 lbs.	S	NA	X	X	X	X	X	X	X	X
CE50-250/250TW	250/250 gallons per side	16" diameter hinged door with a 2 1/2" drain port.		Two 16" x 5" wheels and two 12" x 3" swivel casters.	111" long 48" wide 77" high	2120 lbs.	S	NA	X	X	X	X	X	*	NA	X
CE50-300/300CB1	300/300 gallons per side		CB1 Base - Custom base for mounting on trailer or truck.	Not applicable.	121" long 42" wide 67" high	2233 lbs.	NA	NA	NA	X	X	X	X	*	NA	X

NOTE: Engineering specifications subject to change without notice.



X = Available
S = Standard
NA = Not Available