



Sanborn

TECHNOLOGIES


POWERED BY NORTH AMERICAN FILTRATION



The Freddy Tramp Oil Separator is designed to remove tramp oil from coolants in a variety of applications, including machine tool sumps, component washing systems and quench tanks.


The Tramp Oil Separator runs continuously, separating the oil from the coolant or water whilst the host machine is in operation.

Freddy TRAMP OIL SEPARATOR

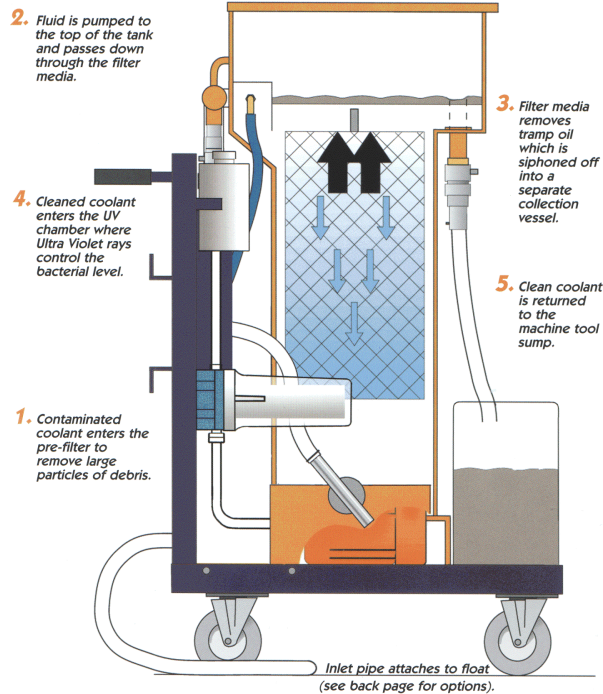

Accessories

Ultraviolet Biological Control System

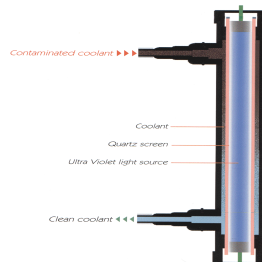

Versatile Suction Inlet System



Models	Suction Lift (Ft)	Processing Rate (GPM)	Hold-Up Volume (Gals)	Dimensions (L W H)	Weight (Pounds)	Price	Add for UV
Air	10	2	15	26 x 20 x 48	110 Dry 265 Wet		
Electric	6	2	15	27 x 20 x 48	110 Dry 265 Wet		

(Specifications and Prices subject to change without notice)