




The Freddy Tramp Oil Separator is designed to remove tramp oil from coolants in a variety of applications, including machine tool sumps, component washing systems and quench tanks.

**Freddy**

**TRAMP OIL SEPARATOR**


The Tramp Oil Separator runs continuously, separating the oil from the coolant or water whilst the host machine is in operation.

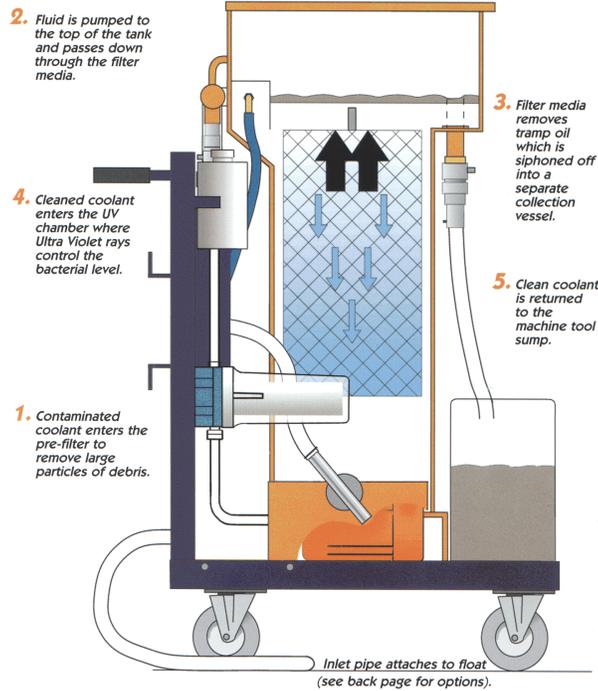

## Accessories

Ultraviolet Biological Control System

Versatile Suction Inlet System



Models	Suction Lift (Ft)	Processing Rate (GPM)	Hold-Up Volume (Gals)	Dimensions (L W H)	Weight (Pounds)	Price	Add for UV
Air	10	2	15	26 x 20 x 48	110 Dry 265 Wet	\$6,560.00	\$770.00
Electric	6	2	15	27 x 20 x 48	110 Dry 265 Wet	\$6,200.00	\$770.00

(Specifications and Prices subject to change without notice)